
NURAPLY TPO UN55 DETAILING MEMBRANE TECHNICAL DATA SHEET

Application Fields

Nuraply TPO UN-55 Detailing Membrane is designed for use with Nuraply TPO. Nuraply UN-55 Detailing Membrane may be installed on:

- Nuraply TPO 1.5mm mechanically attached or fully adhered roofing systems
- See published application and specifications manual for detailed instructions.

Description

Nuraply TPO UN-55 Detailing Membrane provides roofing contractors with an easy-to-install factory-built detail. Nuraply TPO UN-55 Detailing Membrane is constructed using proven, durable, high-performance Nuraply TPO. This accessory is used as an alternative material for flashing penetrations and corners of base and curb flashing.

- **Cost effective...** Reliability is built in; made with Nuraply TPO membrane
- **Improved reliability...** Factory-built accessories reduce risk of leaks and call backs

Product Information


Extreme® TPO UN-55 Detailing Membrane come standard in White. The membrane is unreinforced, so it's easier to work with at difficult flashing details.

SPECIFICATIONS

Membrane Thickness: 1.4mm
Roll Dimensions: 610mm x 15.24m

SHIPPING SPECIFICATIONS

Weight per roll: 12.7kg

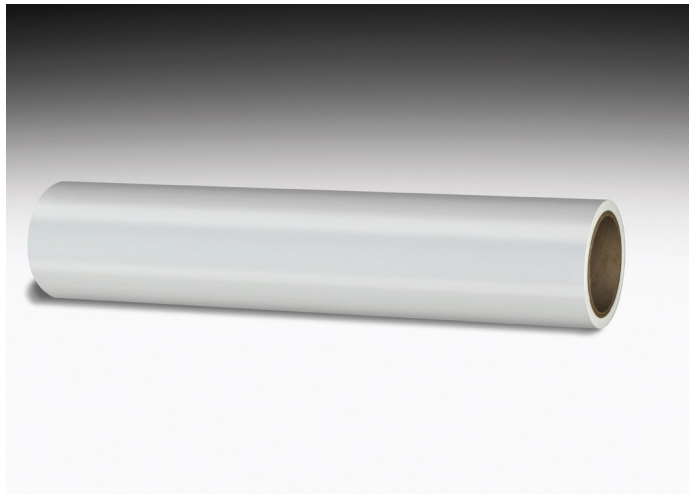

Storage

Nuraply TPO UN-55 Detailing Membrane can be stored in unopened original packs for 5 years at 5 - 35°C in a dry storage place protected against sunlight.

Safety

Please observe the actual valid material safety data sheet and follow the described safety measures for handling of the product.

Transport Classification

N/A

The information in this product data sheet is based on our experience and testing. It represents the latest information available at the time of printing, but no guarantee of its accuracy is made or implied, nor responsibility taken for use to which this information may be put. We reserve the right to alter or up-date information parameters and formulations at any time without notice.